

Z-LINE

S203T / S203TA

Triple-Phase Network Analyzer / RS485 Modbus

Special modules



- ▶ INPUT: up to 600 Vac, 5 Arms (S203TA), 100mA (S203T)
- ▶ OUTPUT: N.1 channel current 0..20, 4..20 mA or voltage 0..5, 0..10 Vdc
- ▶ INTERFACE:
 - RS485 serial communication with Modbus–RTU protocol
 - Analogue output configurable to Vrms, Irms, Watt (bi-directional), cosΦ
- ▶ Insertion: single phase, Aron (three-phase with N.2 CT), four wires (three-phase with N.3 CT)
- ▶ Accuracy: 0,5% (S203TA), 0,2% (S203T)
- ▶ Galvanic isolation @ 3,75 KV
- ▶ Din rail mounting
- ▶ Power supply: 10..40 Vdc, 19..28 Vac



TECHNICAL SPECIFICATIONS

S203T / S203TA - Triple-Phase Network Analyzer / RS485 Modbus



ORDER CODE

Cod.

-S203T (input 100mA, from CT)

-S203TA (input 5A)

Accessories & Software

-TA15: Current transformer (CT) - 15A / 100 mA

-TA25: Current transformer (CT) - 25A / 100 mA

-TA100: Current transformer (CT) - 100A / 100mA

Z-NET3 - configuration software downloading from www.seneca.it



SERIAL LINE ACCESSORIES

- **K107A** – RS485 ↔ RS485 isolator repeater

- **K107B** – RS232 ↔ RS485 converter

- **K107USB (S107USB)** – USB ↔ RS485 converters din rail mounting or portable version (S107USB)

GENERAL FEATURES

Power supply	10÷40Vdc, 19÷28 Vac
Channels	single phase, Aron (three-phase with N.2 CT), four wires (three-phase with N.3 CT)
Accuracy	- 0,5% (S203TA) - 0,2% (S203T)
Status indicators	- Power - Fail - Communication on Rs485
Galvanic Isolation	- Input/Power supply and Input/Output at 3750 Vac - others at 1.500 Vac
Hot swapping	Yes
Power consumption	max 2,5 W
Protections for inputs	Against Surges: up to 4kV
Humidity	30..90% a +40°C (not condensing)
Response time	400 ms

Design	Terminal housing for mounting on 35 mm DIN 46277
Data memory	EEPROM for all configuration data; storage time: 10 years.
DIP Switch	- Address setting - Baud rate setting - Selection of insertion type - Selection of 3 phase o 1 phase - Output
Enclosure	"V0" self-extinguishing glass filled nylon case
Dimensions	105 x 89 x 60 mm (w x h x d)
Weight	About 300 g
Operating temperature	-10..+65 °C
Connections	Removables 3- way screw terminals, 5,08 mm
IP Protection	IP 20
Standards	EN61000-6 EN61010-1 EN60742
Approvals	CE

INPUT


Voltage: max 600 Vac, 50-60 Hz
Current: 5 Arms (S203TA), 100mA from CT (S203T)
-Single phase
-Aron (three phase with N.2 CT)
-Four wires (three-phase with N.3 CT)

Rs485 Modbus RTU slave: 1200...115200 baud rate
Analogue output: corresponding at Vrms, Irms, Watt, cosφ


INTERFACE / OUTPUT

DIMENSIONS AND INSTALLATION



Power supply




RS485



Inputs

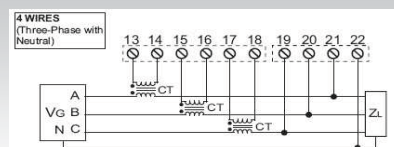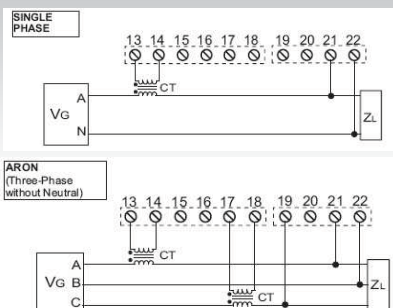

Outputs



REGISTER MACHINE ID	Description Bit [15:8] contain the module's ID: 26. Bit [7:0] contain the firmware's external revision	IND. 40001	R/W R
CHECK_TA	Kind of CT used: passive CT or compensated CT	40024	R/W
Bit [15:1] Bit 0	Not used. Select the kind of CT used: 0*: Passive CT (like the CT in bundle). 1: Compensated CT, which has no phase error. Precision class if CT is passive is granted only with bundle CTs.		
PHASE_RETR	Select the phase on which the analog output will transmit.	40025	R/W
Bit [15:0]	Select the phase on which the analog output will transmit the quantity selected: 0: Phase A (default for single-phase). 1: Phase B. 2: Phase C. All other values: Three phase value (default three-phase).		
TA_RATIO_FL_MSW	Select the rated current of CTs in floating point (most significant word).	40026	R/W
Bit [15:0]	Select the rated current of the CTs connected to the instrument in floating point format. This register influences floating point value of: I rms, Active power, Apparent Power, Reactive Power and Energy (both single and three-phase). It doesn't influence normalised values (0 - 10000) and transmitted output. Default: 1000.0.		
TA_RATIO_FL_LSW	Select the rated current of CTs in floating point (least significant word).	40027	R/W
MINOUT_FL_MSW	Value of the quantity to transmit which gives the minimum retransmitted output (floating point format, most significant word).	40028	R/W
Bit [15:0]	Value of the quantity to transmit (defined via DIP-switch and phase selected via PHASE_RETR register, 40025) which gives the minimum value (0%) of the transmitted output. The value is expressed in floating point format (most significant word) and therefore it must be expressed in the corresponding measurement unit of the quantity chosen (V for V rms, mA for I rms, W for Watt). Default: 0.0.		

SENECA Mi001264-I-E ENGLISH - 9/16

MINOUT_FL_LSW	Value of the quantity to transmit which gives the minimum retransmitted output (floating point format, least significant word).	40029	R/W
MAXOUT_FL_MSW	Value of the quantity to transmit which gives the maximum retransmitted output (floating point format, most significant word).	40030	R/W
Bit [15:0]	Value of the quantity to transmit (defined via DIP-switch and phase selected via PHASE_RETR register, 40025) which gives the maximum value (100%) of the transmitted output. The value is expressed in floating point format (most significant word) and therefore it must be expressed in the corresponding measurement unit of the quantity chosen (V for V rms, mA for I rms, W for Watt). Default: 600.0.		
MAXOUT_FL_LSW	Value of the quantity to transmit which gives the maximum retransmitted output (floating point format, least significant word).	40031	R/W
CHECK_FREQ	Enables measurement errors compensation of Active Power and Energy caused by network frequency variations.	40032	R/W
Bit [15:1] Bit 0	Not used. Errors compensation caused by network frequency variations: 1: If network frequency is not stable at 50 Hz or 60 Hz, or has consistent variations (> 30 mHz), this register corrects the measurement of Power and Energy. The measurements of V rms and I rms are not influenced by this setting.		
ADDR_PARITY	Register for the setting of the module's address and parity control.	40033	R/W
Bit [15:8] Bit [7:0]	Set the module's address. Allowed values from 0x00 a 0xFF (decimal values in the interval of 0-255). Default: 1. Set the type of parity control: 00000000*: No parity (NONE) 00000001: Even parity (EVEN) 00000010: Odd parity (ODD)		
BAUDR_ANDEL	Register for the setting of the Baud rate and the response delay time in characters.	40034	R/W
Bit [15:8]	Set the serial communication speed value (Baudrate):		

SENECA Mi001264-I-E ENGLISH - 10/16

00000000 (0x00): 4800 Baud 00000001 (0x01): 9600 Baud 00000010 (0x02): 19200 Baud 00000011* (0x03): 38400 Baud 00000100 (0x04): 57600 Baud 00000101 (0x05): 115200 Baud 00000110 (0x06): 1200 Baud 00000111 (0x07): 2400 Baud			
Bit [7:0]	Set the response delay time in characters that represents the number of pauses of 6 characters each to be entered between the end of the Rx message and the start of the Tx message. Default: 0		
RESET_ZERO ENERGY	Reset instrument and zero setting energy	40131	R/W
Bit [15:0]	-Writing 0x1234 resets(boots) instrument. -Writing 0x1000, resets active energy accumulation in all three phases.		
STATUS	Status Register	40133	R
Bit 15	1: Error saving Active Energy value.		
Bit [14:7]	Not Used.		
Bit 6	1: Phase B and C are reverse-connected		
Bit 5	1: Voltage on phase C is > 40 V therefore measurements on phase C are correctly acquired.		
Bit 4	1: Voltage on phase B is > 40 V therefore measurements on phase B are correctly acquired.		
Bit 3	1: Voltage on phase A is > 40 V therefore measurements on phase A are correctly acquired.		
Bit [2:0]	Non utilizzati.		
VRMS_A_FL_MSW	Single phase or phase A V rms measurement (floating point, most significant word) in Volt	40135	R
VRMS_A_FL_LSW	Single phase or phase A V rms measurement (floating point, least significant word) in Volt	40136	R
VRMS_B_FL_MSW	Phase B V rms measurement (floating point, most significant word) in Volt	40137	R
VRMS_B_FL_LSW	Phase B V rms measurement (floating point, least significant word) in Volt	40138	R
VRMS_C_FL_MSW	Phase C V rms measurement (floating point, most significant word) in Volt	40139	R
VRMS_C_FL_LSW	Phase C V rms measurement (floating point, least significant word) in Volt	40140	R

SENECA Mi001264-I-E ENGLISH - 11/16

VRMS_3PH_FL_MSW	Mean V rms in Volt: $(V_A+V_B+V_C)/3$ (floating point, most significant word).	40141	R
VRMS_3PH_FL_LSW	Mean V rms in Volt: $(V_A+V_B+V_C)/3$ (floating point, least significant word).	40142	R
IRMS_A_FL_MSW	Single phase or phase A I rms measurement (floating point, most significant word) in mA	40143	R
IRMS_A_FL_LSW	Single phase or phase A I rms measurement (floating point, least significant word) in mA	40144	R
IRMS_B_FL_MSW	Phase B I rms measurement (floating point, most significant word) in mA.	40145	R
IRMS_B_FL_LSW	Phase B I rms measurement (floating point, least significant word) in mA.	40146	R
IRMS_C_FL_MSW	Phase C I rms measurement (floating point, most significant word) in mA.	40147	R
IRMS_C_FL_LSW	Phase C I rms measurement (floating point, least significant word) in mA.	40148	R
IRMS_3PH_FL_MSW	Mean I rms in mA: $(I_A+I_B+I_C)/3$ (floating point, most significant word).	40149	R
IRMS_3PH_FL_LSW	Mean I rms in mA: $(I_A+I_B+I_C)/3$ (floating point, least significant word).	40150	R
WATT_A_FL_MSW	Single phase or phase A Power measurement (floating point, most significant word) in W	40151	R
WATT_A_FL_LSW	Single phase or phase A Power measurement (floating point, least significant word) in W	40152	R
WATT_B_FL_MSW	Phase B Power measurement (floating point, most significant word) in W	40153	R
WATT_B_FL_LSW	Phase B Power measurement (floating point, least significant word) in W	40154	R
WATT_C_FL_MSW	Phase C Power measurement (floating point, most significant word) in W	40155	R
WATT_C_FL_LSW	Phase C Power measurement (floating point, least significant word) in W	40156	R
WATT_3PH_FL_MSW	Three phase Power in W: $P_A+P_B+P_C$ (floating point, most significant word).	40157	R
WATT_3PH_FL_LSW	Three phase Power in W: $P_A+P_B+P_C$ (floating point, least significant word).	40158	R
VAR_A_FL_MSW	Single phase or phase A Reactive Power in VAR (floating point, most significant word).	40159	R
VAR_A_FL_LSW	Single phase or phase A Reactive Power in VAR (floating point, least significant word).	40160	R

SENECA Mi001264-I-E ENGLISH - 12/16

VAR_B_FL_MSW	Phase B Reactive Power in VAR (floating point, most significant word).	40161	R
VAR_B_FL_LSW	Phase B Reactive Power in VAR (floating point, least significant word).	40162	R
VAR_C_FL_MSW	Phase C Reactive Power in VAR (floating point, most significant word).	40163	R
VAR_C_FL_LSW	Phase C Reactive Power in VAR (floating point, least significant word).	40164	R
VAR_3PH_FL_MSW	Reactive power three-phase in VAR: $Q_A+Q_B+Q_C$ (floating point, most significant word).	40165	R
VAR_3PH_FL_LSW	Reactive power three-phase in VAR: $Q_A+Q_B+Q_C$ (floating point, least significant word).	40166	R
VA_A_FL_MSW	Single phase or phase A Apparent Power in VA (floating point, most significant word).	40167	R
VA_A_FL_LSW	Single phase or phase A Apparent Power in VA (floating point, least significant word).	40168	R
VA_B_FL_MSW	Phase B Apparent Power in VA (floating point, most significant word).	40169	R
VA_B_FL_LSW	Phase B Apparent Power in VA (floating point, least significant word).	40170	R
VA_C_FL_MSW	Phase C Apparent Power in VA (floating point, most significant word).	40171	R
VA_C_FL_LSW	Phase C Apparent Power in VA (floating point, least significant word).	40172	R
VA_3PH_FL_MSW	Apparent Power Three-phase in VA: $S_A+S_B+S_C$ (floating point, most significant word).	40173	R
VA_3PH_FL_LSW	Apparent Power Three-phase in VA: $S_A+S_B+S_C$ (floating point, least significant word).	40174	R
cosφ_A_FL_MSW	Single phase or phase A Power factor (floating point, most significant word).	40175	R
cosφ_A_FL_LSW	Single phase or phase A Power factor (floating point, least significant word).	40176	R
cosφ_B_FL_MSW	Phase B Power factor cosφ (floating point, most significant word).	40177	R
cosφ_B_FL_LSW	Phase B Power factor cosφ (floating point, least significant word).	40178	R
cosφ_C_FL_MSW	Phase C Power factor cosφ (floating point, most significant word).	40179	R

SENECA Mi001264-I-E ENGLISH - 13/16


cosφ_C_FL_LSW	Phase C Power factor cosφ (floating point, least significant word).	40180	R
cosφ_3PH_FL_MSW	cosφ three phase: WATT_3PH / VA_3PH (floating point, most significant word).	40181	R
cosφ_3PH_FL_LSW	cosφ three phase: WATT_3PH / VA_3PH (floating point, least significant word).	40182	R
FREQ_FL_MSW	Frequency measurement in Hz (floating point, most significant word).	40183	R
FREQ_FL_LSW	Frequency measurement in Hz (floating point, least significant word).	40184	R
ENER_A_FL_MSW	Single phase or phase A Active Energy in Wh (floating point, most significant word).	40185	R
ENER_A_FL_LSW	Single phase or phase A Active Energy in Wh (floating point, least significant word).	40186	R
ENER_B_FL_MSW	Phase B Active Energy in Wh (floating point, most significant word).	40187	R
ENER_B_FL_LSW	Phase B Active Energy in Wh (floating point, least significant word).	40188	R
ENER_C_FL_MSW	Phase C Active Energy in Wh (floating point, most significant word).	40189	R
ENER_C_FL_LSW	Phase C Active Energy in Wh (floating point, least significant word).	40190	R
ENER_3PH_FL_MSW	Active energy three phase in Wh: $E_A+E_B+E_C$ (floating point, most significant word).	40191	R
ENER_3PH_FL_LSW	Active energy three phase in Wh: $E_A+E_B+E_C$ (floating point, least significant word).	40192	R
VRMS_A_INT	Single phase or phase A V rms normalised 0..+10000.	40193	R
VRMS_B_INT	Phase B V rms normalised 0..+10000.	40194	R
VRMS_C_INT	Phase C V rms normalised 0..+10000.	40195	R
VRMS_3PH_INT	Mean V rms $(V_A+V_B+V_C)/3$ normalised 0..+10000.	40196	R
IRMS_A_INT	Single phase or phase A I rms normalised 0..+10000.	40197	R
IRMS_B_INT	Phase B I rms normalised 0..+10000.	40198	R
IRMS_C_INT	Phase C I rms normalised 0..+10000.	40199	R

SENECA Mi001264-I-E ENGLISH - 14/16

IRMS_3PH_INT	Mean I rms $(I_A+I_B+I_C)/3$ normalised 0..+10000.	40200	R
WATT_A_INT	Single phase or phase A Active power normalised 0..+10000.	40201	R
WATT_B_INT	Phase B Active power normalised 0..+10000.	40202	R
WATT_C_INT	Phase C Active power normalised 0..+10000.	40203	R
WATT_3PH_INT	Three phase active power $P_A+P_B+P_C$ normalised 0..+10000.	40204	R
VAR_A_INT	Single phase or phase A Reactive Power normalised -10000..+10000.	40205	R
VAR_B_INT	Phase B Reactive Power normalised -10000..+10000.	40206	R
VAR_C_INT	Phase C Reactive Power normalised -10000..+10000.	40207	R
VAR_3PH_INT	Three phase reactive power $Q_A+Q_B+Q_C$ normalised -10000..+10000.	40208	R
VA_A_INT	Single phase or phase A Apparent Power normalised 0..+10000.	40209	R
VA_B_INT	Phase B Apparent Power normalised 0..+10000.	40210	R
VA_C_INT	Phase C Apparent Power normalised 0..+10000.	40211	R
VA_3PH_INT	Apparent power three phase $S_A+S_B+S_C$ normalised 0..+10000.	40212	R
cosφ_A_INT	Single phase or phase A power factor cosφ normalised: -10000..+10000.	40213	R
cosφ_B_INT	Phase B power factor cosφ normalised: -10000..+10000.	40214	R
cosφ_C_INT	Phase C power factor cosφ normalised: -10000..+10000.	40215	R
cosφ_3PH_INT	Three phase power factor cosφ=WATT/VA normalised: -10000..+10000.	40216	R

SENECA Mi001264-I-E ENGLISH - 15/16

RETRANS_INT	Visualize the quantity to transmit normalised 0..+10000, scaled to min and MAX values set.	40217	R
Bit [15:0]	Value of the quantity to transmit normalised 0..+10000, scaled to the minimum and maximum threshold set in registers MINOUT_FL (40028-29) e MAXOUT_FL (40030-31) respectively. 0: if the floating point value of the quantity to transmit is less than MINOUT_FL (40028-29) 10000: if the floating point value of the quantity to transmit is equal to MAXOUT_FL (40030-31). In the intermediate points has a linear behaviour. The value of the register follows linearly the quantity to transmit until maximum value set to 11000, saturating over this value.		



Disposal of Electrical & Electronic Equipment (Applicable throughout the European Union and other European countries with separate collection programs)

This symbol, found on your product or on its packaging, indicates that this product should not be treated as household waste when you wish to dispose of it. Instead, it should be handed over to an applicable collection point for the recycling of electrical and electronic equipment.

By ensuring this product is disposed of correctly, you will help prevent potential negative consequences to the environment and human health, which could otherwise be caused by inappropriate disposal of this product. The recycling of materials will help to conserve natural resources. For more detailed information about the recycling of this product, please contact your local city office, waste disposal service or the retail store where you purchased this product.

This document is property of SENECA s.r.l. Duplication and reproduction are forbidden, if not authorized. Contents of the present documentation refers to products and technologies described in it. All technical data contained in the document may be modified without prior notice. Content of this documentation is subject to periodical revision.

SENECA Mi001264-I-E ENGLISH - 16/16